


TELESCOPIC PROPS



TIE-ROD AND ACCESSORIES

Telescopic Props are used as support under formwork for bearing floor and sub-beam loads. It is very easy to set up, disassemble and transport. Working capacity, life and sensitivity are quite high. It is produced according to different head types for various applications. (Four Way, Long U, Standard U, Straight). It has an adjustment mechanism. It can be adjusted to the desired height.

It is produced in adjustable sizes of 3.0 m 3.5 m 4.0 m 4.5 m 5.0 m 6.0 m height. Telescopic props consist of two main parts, inner and outer pipes. The outer pipes are produced from steel pipes with a diameter of $\varnothing 60$ mm, and the inner pipes from steel pipes with a diameter of $\varnothing 48$ mm with TSE certificate. Production is available in different headings according to the floor or under the beam. All accessories of telescopic props are produced by our company. (Mechanism, Bolt Nut, Hook, Lever, Flat Head, Four Way Head, Long U Head, Standard U Head, Flat Head, Base Plate).

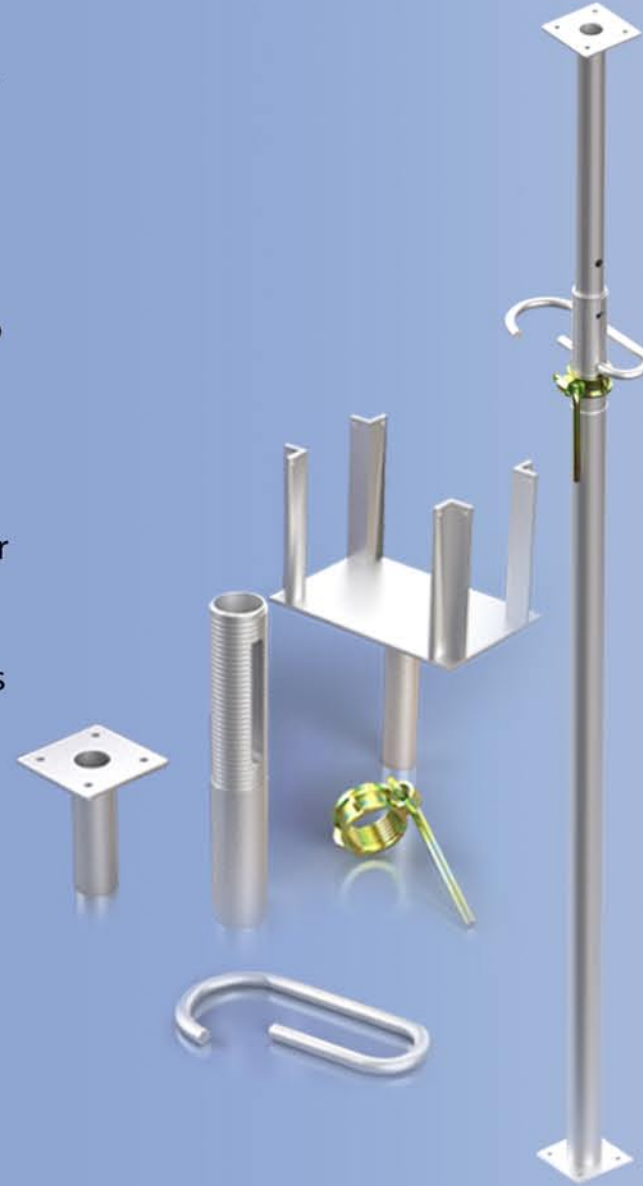

Tie Rod is the name given to the formwork tension shaft of shearwalls and columns. Tie Rod mainly provides the necessary connection between the boards on the two faces of the shearwall-column and beam formwork. It is used in many fields due to its practicality of use. In addition to the Tie Rod shaft, Tie Rod nut and Tie Rod Plate are also produced.

FEATURES

- Tightening and dismantling process is very fast due to its special gear structure.
- It provides advantages in terms of cost and safety by protecting the molds.
- They are easy to maintain and have a long life.
- Thanks to its nut and plate, there is no cracking or breakage in the formworks.
- Tensile strength is quite high and it is 91 kN for Tie Rod produced with $\varnothing 17$ mm diameter.






ITALIAN TYPE SCAFFOLDING



SAFETY FACADE SCAFFOLDING

Below are the features of bushing-type scaffolding:

- Pitch: 1800 mm
- Frame height: 2000 mm
- Frame depth: 1050 mm
- Half frame height: 1240 mm
- Length of horizontal ledgers centre distance: 1725 mm
- Length of diagonal braces centre distance: 2100 mm
- Frame weight: 18.50 kg , Half frame weight: 14.00 kg
- Horizontal ledgers weight: 2.60 kg , Diagonal braces weight: 3.10 kg
- Maximum load: 30kN/m²
- S235JR steel pipes
- Red RAL 3009 dip coating or hot-dip galvanization according to the UNI EN ISO 1461 standard
- Platforms with trapdoors and ladder
- Safety parapets for the ends, stone guards, rods, top parapets, adjustable base plates, toeboards.

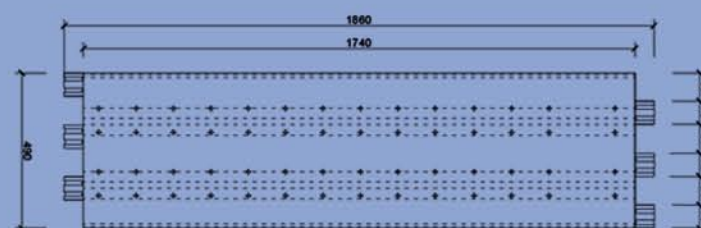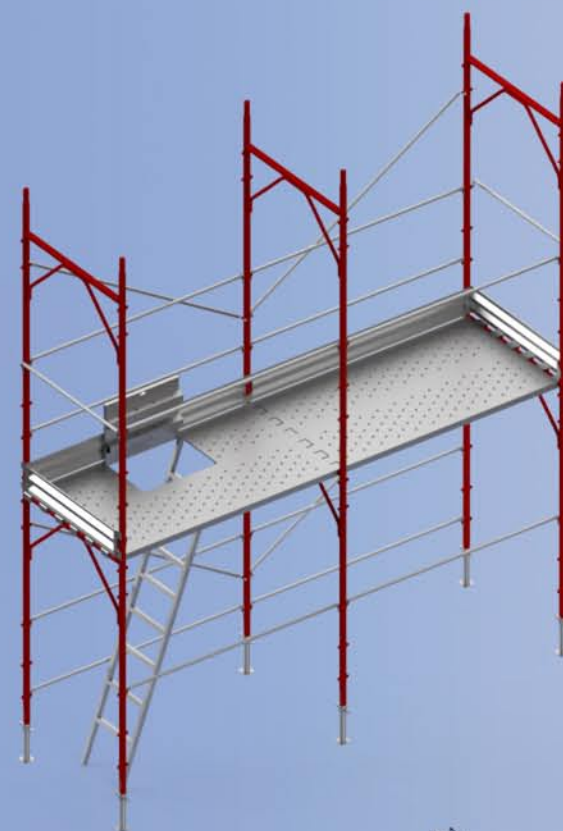

Safety Facade Scaffolding , consists of vertical frame, horizontal element, diagonal element, walking platforms, covered ladder platforms, adjustment shafts and toeboard elements. Safe scaffolding provides a practical, economical and fast solution for facade sheathing, coating, painting, restoration and many other works. Installation and disassembly is quite simple. Production is carried out in accordance with European and World standards. Frames are produced from Ø 48x3 mm steel pipes in accordance with EN 12810 and EN 12811 norms.

FEATURES

- Frames are produced to overlap each other with the help of pins.
- Horizontal and diagonal members are connected with the help of pins.
- Walking platforms are produced with holes to prevent slipping and falling.
- All elements are produced by robots automatically and in series.
- Many kinds of frames are produced in accordance with the standards.
- Scaffolding level can be adjusted according to the ground thanks to the adjustment shafts.


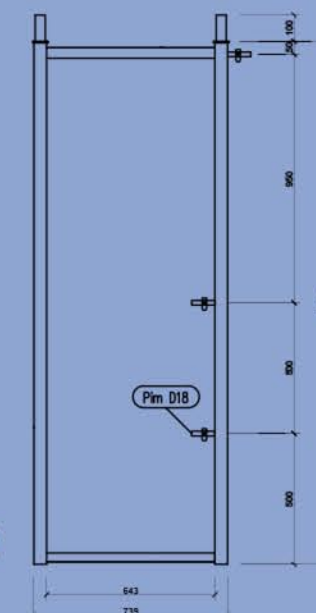


TABLE TYPE SCAFFOLDING


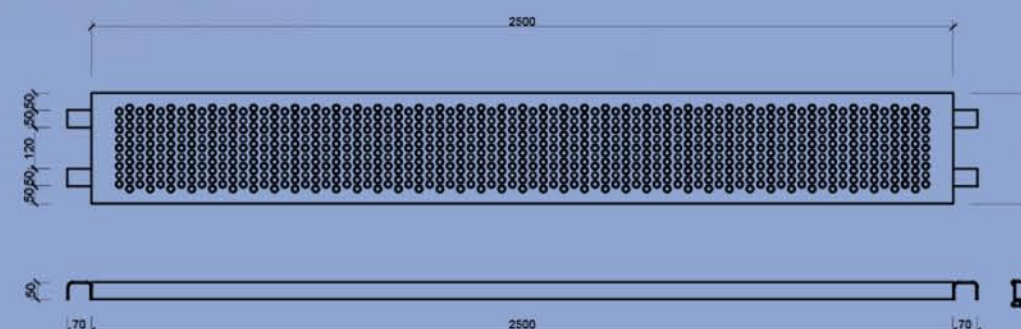


CUPLOCK SCAFFOLDING

Table type scaffolding system, which is used as an underfloor scaffolding system, is very easy and fast to install. It consists of frame, diagonal element, pin, lower and upper adjustment shafts. The durability is high. They are used in highways, bridges, viaducts, under heavy floor load and all other structures. They are manufactured from TSE certified pipes.

FEATURES


When used as a Table Formwork System, it can be used without disassembly until the end of the project. It has a high carrying capacity. By creating large sized tables during molding, labor, time and material quantity are saved. It is produced automatically in arc welding robots.

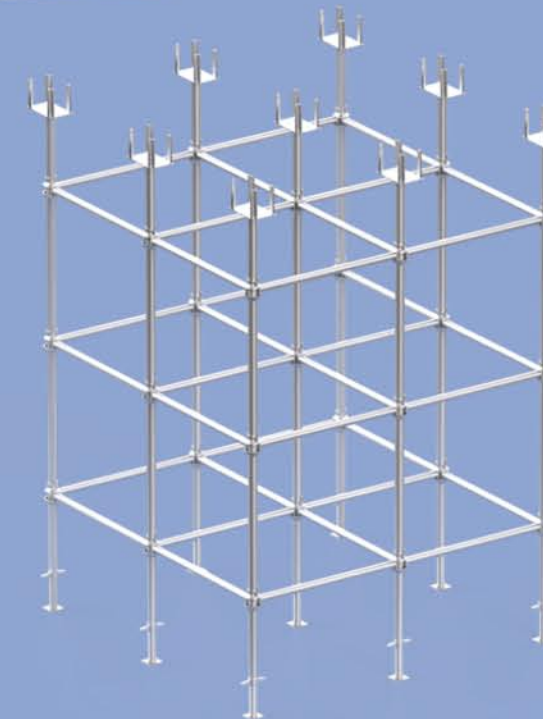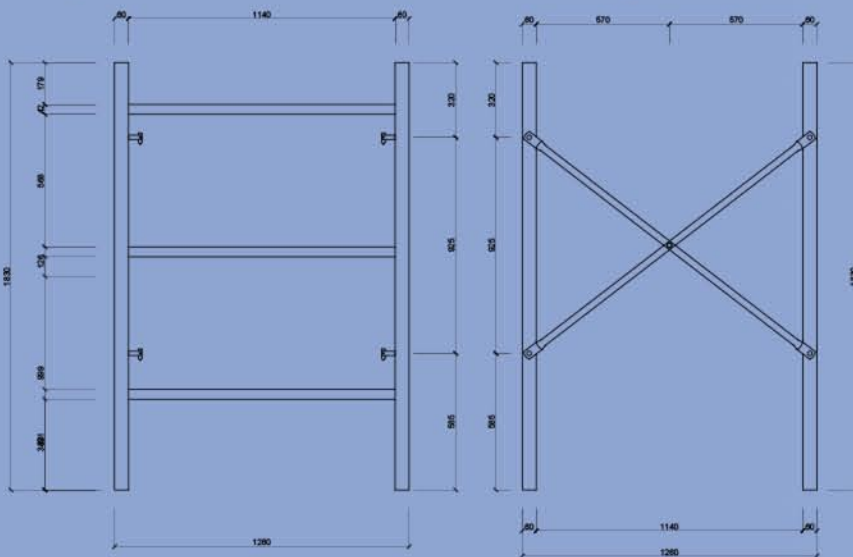

Cup-Lock scaffolding, which is used as a high load bearing system under the floor and beam formwork, is also a system that can be used as an exterior scaffolding. It is especially used as a formwork carrier scaffolding. The system consists of vertical elements consisting of lower bowls and cups and horizontal. Vertical elements $\varnothing 48 \times 3$ mm, horizontal elements $\varnothing 48 \times 2.5$ mm are manufactured from TSE certified pipes. Installation and disassembly is very easy. There is no risk of loss as it is on the pieces. It has ease of height adjustment with its lower and upper adjustment shafts. Horizontal elements with welded pieces pass into the cups found in the vertical elements. Installation is provided with hammer blows and high load carrying is ensured with confidence.

SYSTEM FEATURES

- Bottom bowl and cup connections located at 50 cm or 100 cm intervals on vertical elements increase the carrying capacity of the scaffolding strut.
- Up to 4 horizontal connections can be made in all directions at the connection point on the uprights.
- Easily installed and disassembled with a single hammer blow. It is very advantageous in terms of time and labor since no fastener is used.
- It can be used safely at the desired height and width.
- Walking platforms are produced with holes to prevent slipping and falling.
- Elements are produced automatically and in series in gas metal arc welding robots.
- Its durability is quite high.

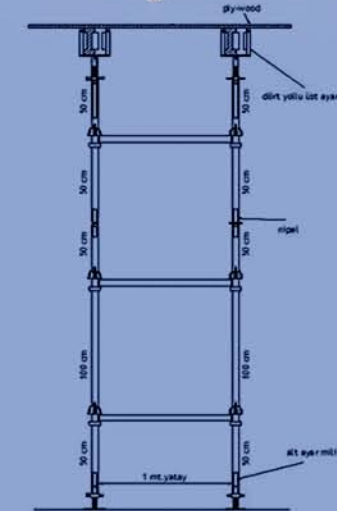

RINGLOCK SCAFFOLDING





MOBILE SCAFFOLDING

The ringlock scaffolding system, which is used as exterior scaffolding, offers the possibility of using scaffolding compatible with all kinds of facades. The system consists of flanged uprights and hooked horizontal members. Vertical elements $\varnothing 48 \times 3$ mm, horizontal elements $\varnothing 48 \times 2.5$ mm are manufactured from TSE certified pipes. Strut flange intervals are 50 cm or 100 cm, and these dimensions change in special projects. The hook is made of $\varnothing 48 \times 4$ mm pipe. Installation and disassembly is very easy. Adjustment spindles are used to adjust the level difference. Easy to install with a hammer.

SYSTEM FEATURES



- Connections made to flanged vertical elements are made with steel casting head elements. It is fixed with a steel piece called wedge.
- Horizontal elements can be connected to 1 flange in 8 different directions.
- Since the wedges are produced with rivets, they are produced integrally to the horizontal elements. It provides the opportunity to be transported without additional elements.
- Easily installed and dismantled. It is very advantageous in terms of time and labor since it does not have any additional elements.
- It can be used safely at the desired height and width.
- Walking platforms are produced with holes to prevent slipping and falling.
- Elements are produced automatically and in series in gas metal arc welding robots.

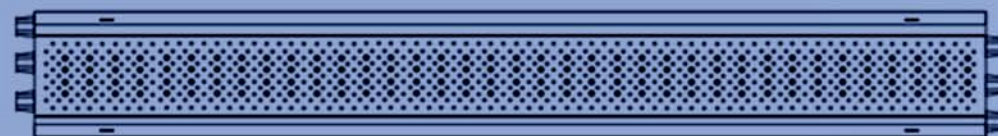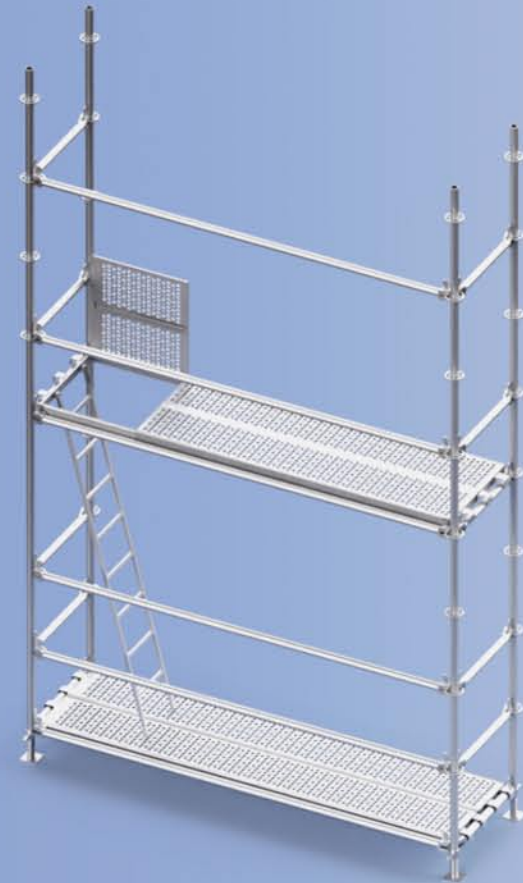

Mobile Scaffolding consists of vertical frame, horizontal element, diagonal element, walking platforms, platforms with lids and ladders. Mobile scaffolding provides a practical, economical and fast solution for interior and exterior sheathing, coating, painting, restoration and many other works. It can move easily thanks to its wheels.

FEATURES

- The most comfortable working can be achieved with platforms of different widths.
- Frames are produced to overlap each other with the help of pins.
- Horizontal and cross members are connected with the help of pins.
- Walking platforms are produced with holes to prevent slipping and falling.
- All elements are welded by robots.
- Thanks to its high load carrying capacity and locked wheels, it can be easily transported to the desired location and fixed by locking.

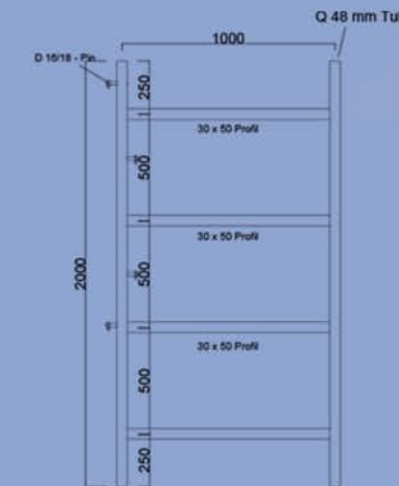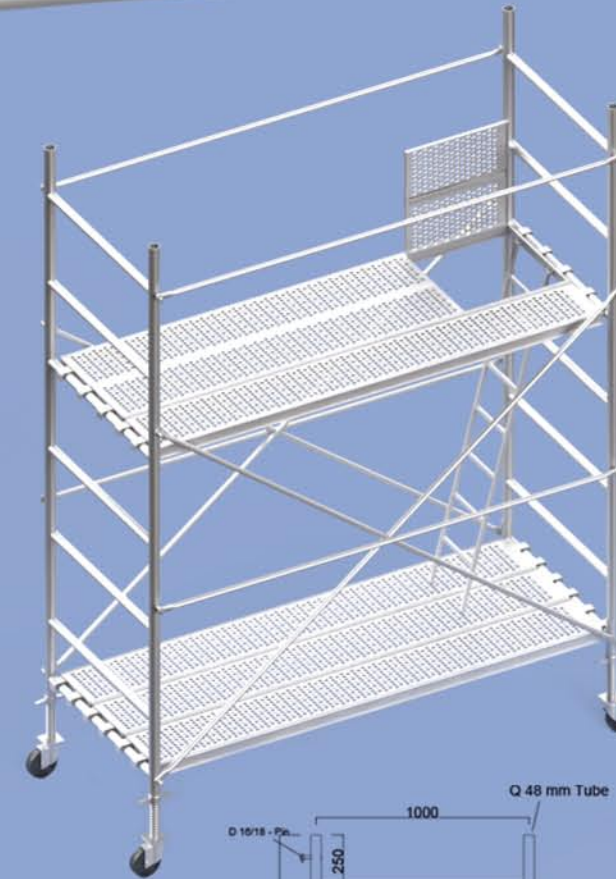

SPACER TYPES



SCAFFOLDING ACCESSORIES



SHEAR WALL TYPE SPACERS

This type of spacers used in curtain and column iron hardware are manufactured at different heights in accordance with various iron diameters. Grip feet can easily grasp different iron diameters.




NORM TYPE HEAVY SLAB MOLD SPACERS

It is a footed system cover that provides cover space in horizontal iron equipment in foundations. Easily in heavy iron equipment available. It increases the carrying and non-overturning properties of iron.



LATCH TYPE SLAB SPACERS

It is the most useful cover type for horizontal iron system, iron equipment, curtain laying, column and precast applications.

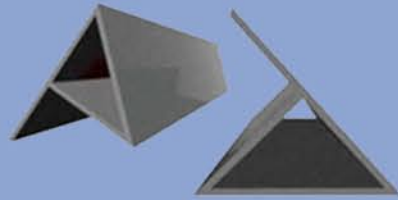


TRIANGLE BEVELING LATHS

In vertical reinforced concrete elements such as columns and curtains. It is used when chamfering is required on the corners. It can also be used as a finishing profile in areas where sealing is required. It is hammered into the mold from the eared part.



SPACING LATHS

In reinforced concrete formworks with horizontal and vertical surfaces, formwork attachments. It is used to prevent places from appearing or to create shapes on the concrete surface for various reasons. It is made of original PVC. It is made to be impact resistant.

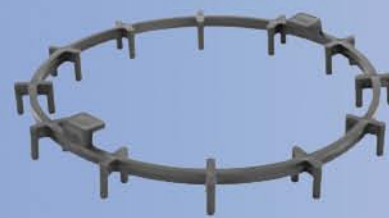


CIRCLE TYPE SLAB SPACER

This type of floor mat, which provides great convenience in large-area floors and when using mesh steel, easily grasps plain iron thanks to the two iron grip protrusions on the top. It is laid on the surface at appropriate intervals.



SCREW BASE JACK

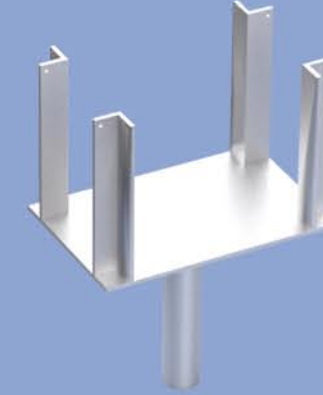

FOUR WAY HEAD



FORMWORK LOCK



TELESCOPIC STRUT MECHANISM



MECHANISM NUT



ADJUSTMENT HOOK



WATERPROOF



MOVING CLAMP



FIXED CLAMP

Nazsan Group Dış Ticaret Ve Danışmanlık Ltd Şti.
Organize sanayi Bölgesi 8.cadde No:15 Nazilli/Aydın Turkey
Gsm: +90 538 447 00 71 - E-mail: info@nazsangroup.com
www.nazsangroup.com